

Composite street cover
Round or square surface plate, round or square lid

Use:

For AVK telescopic extension spindle.

Application:

Short term max 180 degrees.

Optional extra:

Various lid inscriptions.


Materials:

Surface plate and lid	Ductile iron min. GGG-40, to DIN 1693 (BS 2789 grade 420 - 12 min.)
Coating	Outside electrostatically applied epoxy resin to DIN 30677. Alternative black primer
Seal ring	NBR
Body	Polyamid PA6



Composite street cover
Round or square surface plate, round or square lid

Component list	
1. Surface plate	3. Lid
2. Seal ring	4. Body

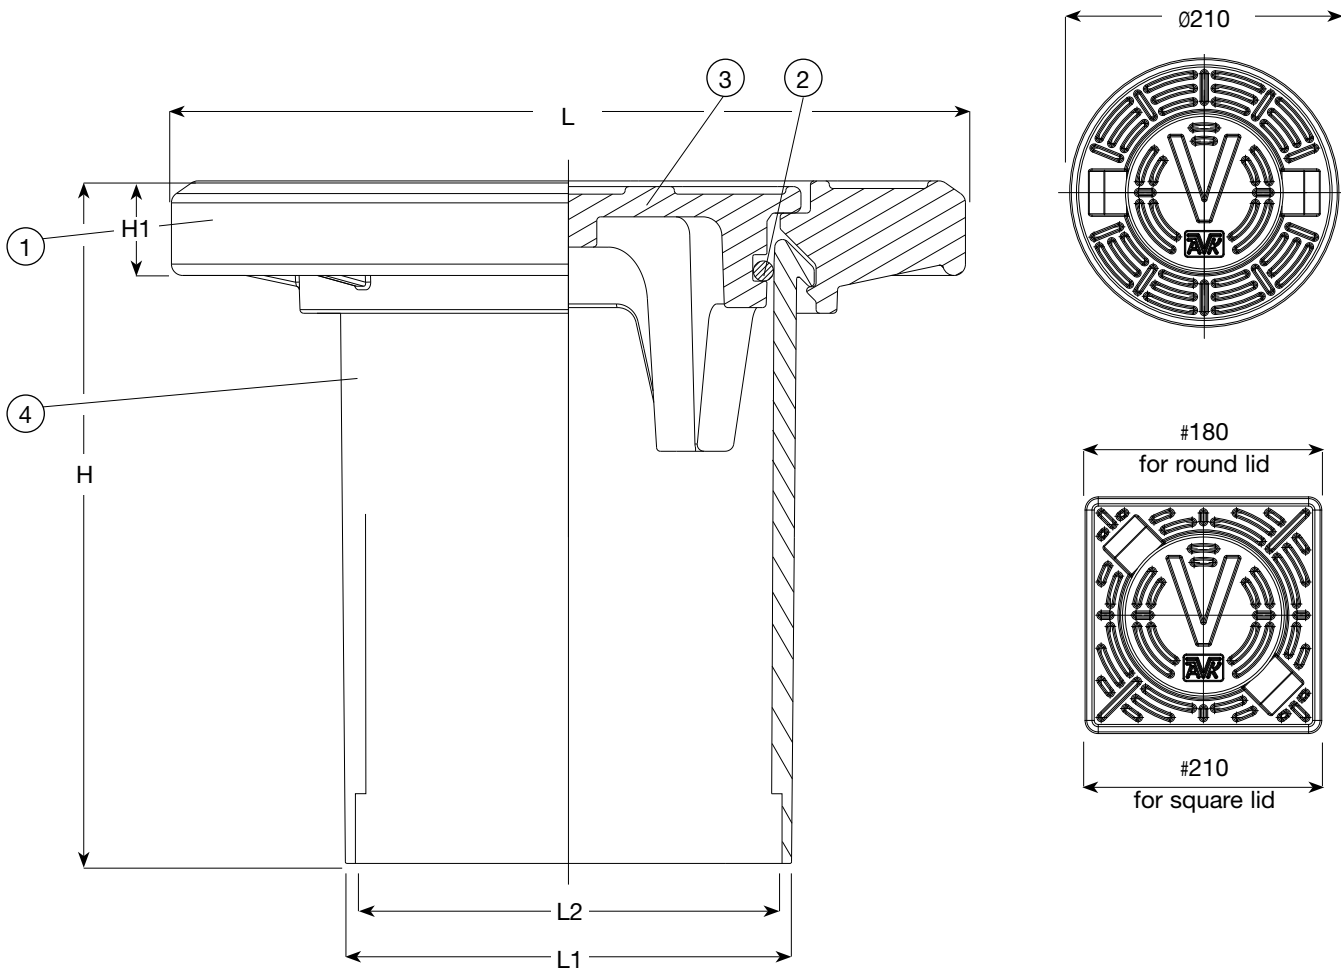

Blue epoxy Complete street cover Round flange Ref. nos.	Black primer Complete street cover Round flange Ref. nos.	Lid*	Flange D mm	L1 mm	L2 mm	H mm	H1 mm	Weight kilos
04-007-7506900	04-007-7506908	Square	Ø 210	Ø 118	Ø 110	180	25	4.2
04-007-2505900	04-007-2505908	Round	Ø 210	Ø 118	Ø 110	180	25	4.2

Blue epoxy Complete street cover Square flange Ref. nos.	Black primer Complete street cover Square flange Ref. nos.	Lid*	Flange D mm	L1 mm	L2 mm	H mm	H1 mm	Weight kilos
04-007-7511900	04-007-7511908	Square	# 210	Ø 118	Ø 110	180	25	4.3
04-007-2510900	04-007-2510908	Round	# 180	Ø 118	Ø 110	180	25	4.2

* Inscription in lit: "V" and AVK logo.